


Chrysler 300 F #46200
Comp Cams #21-222-4
Timing at .050" Lobe Lift

Intake Duration: 218°
Exhaust Duration: 224°
Intake Valve Lift: .462"
Exhaust Valve Lift: .470"

Letter Landscape

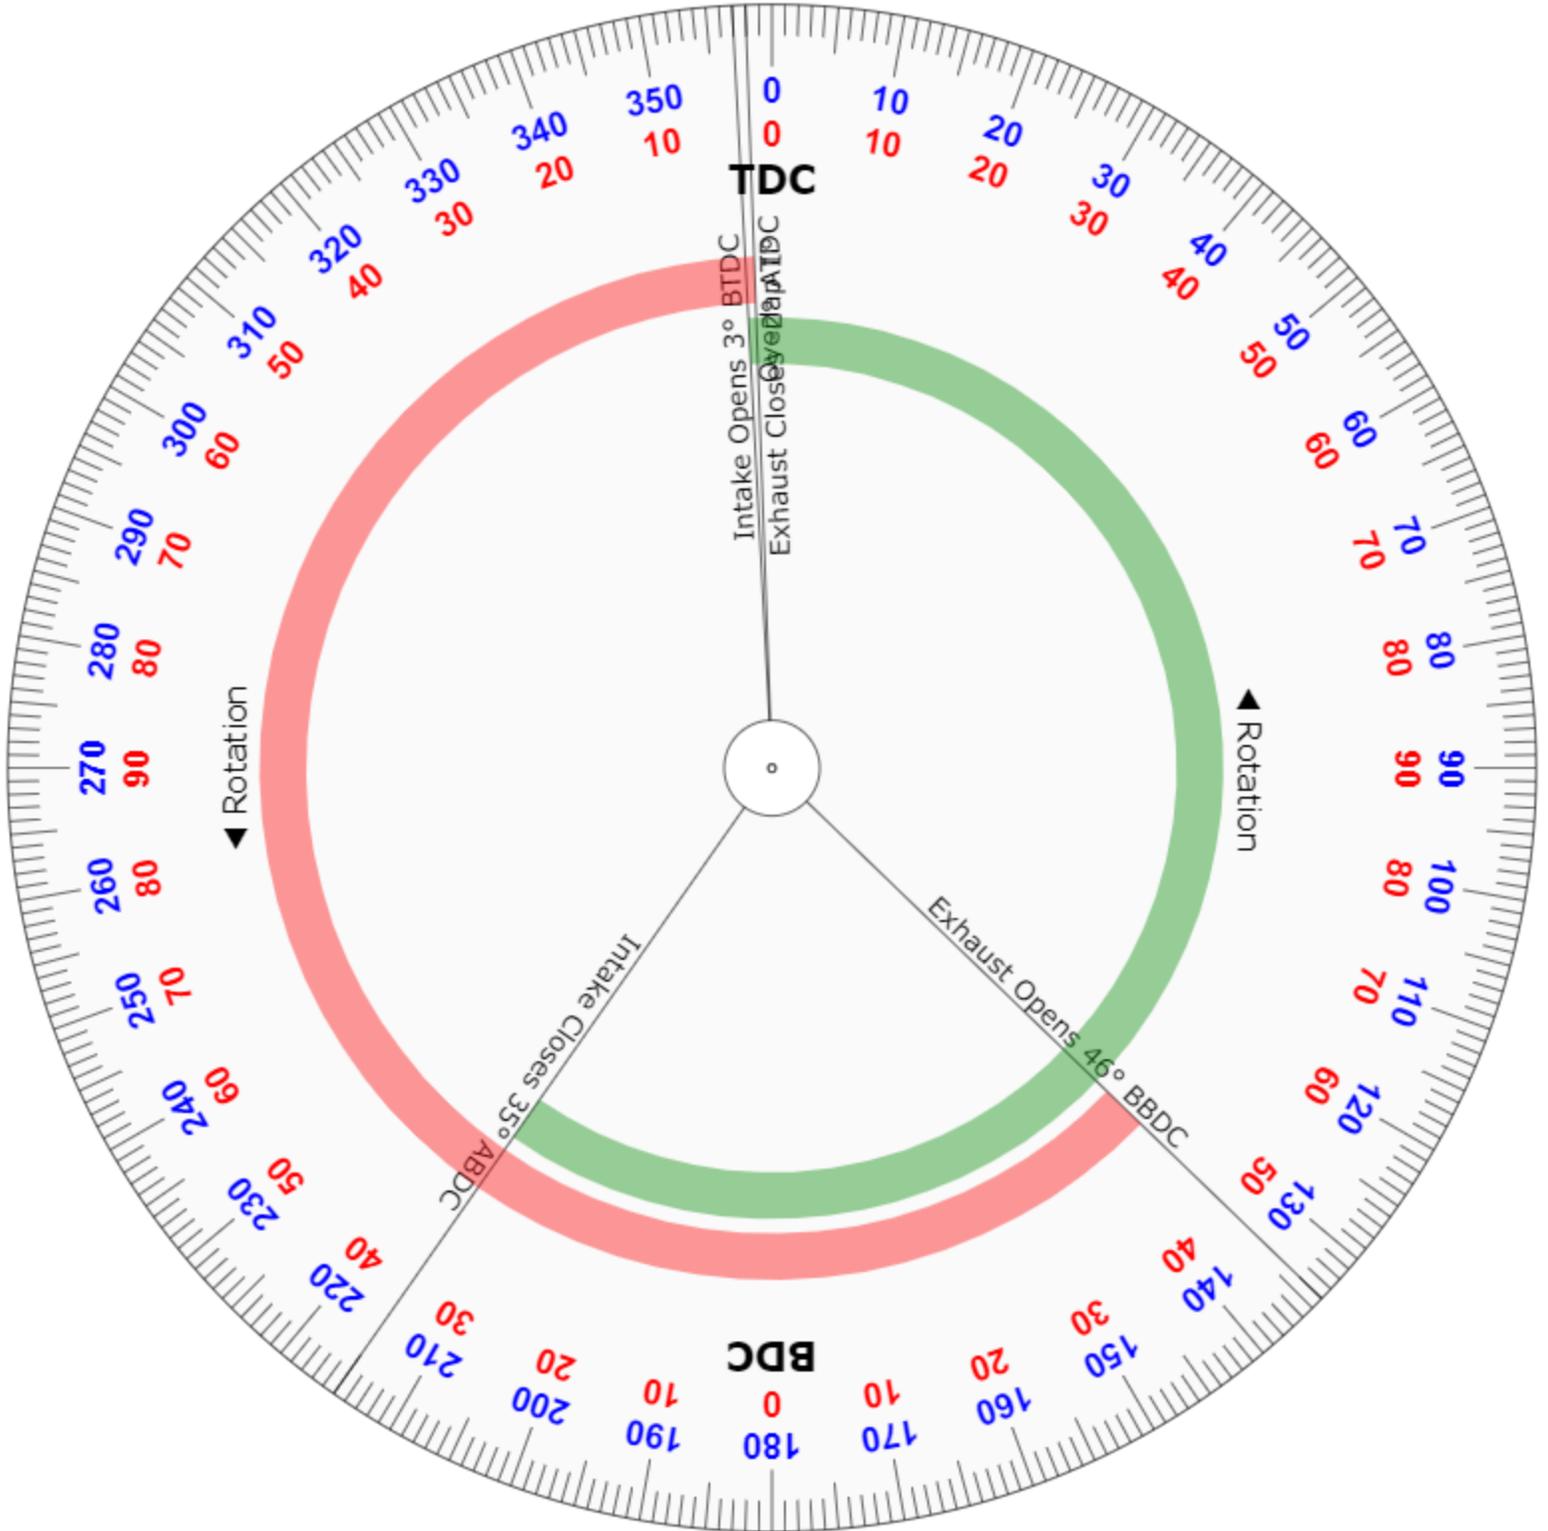

Intake Centerline: 106° ATDC
Exhaust Centerline: 114° BTDC
Lobe Separation: 110°
Overlap: 1°